

DD700C 摄像系统灯

Camera System

无影灯摄像系统由手术无影灯, 摄像机, 多媒体电脑数码监控系统和显示器构成。

中置摄像系统采用进口专业摄像弹簧臂系统, 摄像机设计在灯的手柄中心位置, 接触可靠, 更美观, 更加灵活;

外置吊臂摄像系统, 摄像机设计在一根独立的专业摄像臂上, 均可360°全方位调节, 图像效果更佳。

采用进口品牌智能化摄像机, 高清晰度, 480高线数、超动态; 光学变焦、自动光圈、自动白平衡。

数字控制主机采用H264压缩法, 清晰度更高。具备单、多画面实时预览、切换显示; 自动存储图像、视频回放、远程网络传输等功效。

Operating light camera system consists of operating light, camera, multimedia digital monitoring systems and computer monitors.


Build-in camera system adopts imported professional camera spring arm system. The camera was designed to put in the center of the lamp handle, reliable, beautiful, and flexible;

External hanging camera system with camera designed to install on an independent professional camera arm which can be 360° full range positioned to present a better effect of the image.

Use imported brands intelligent cameras of high-definition, 480 high resolution, ultra-dynamic; optical zoom, auto iris, and auto white balance.

Digital control host computer use H264 compression with better clarity. With a single, multi-screen real time preview, switch display; automatically store images, video playback, remote network transmission.

安装板尺寸示意图

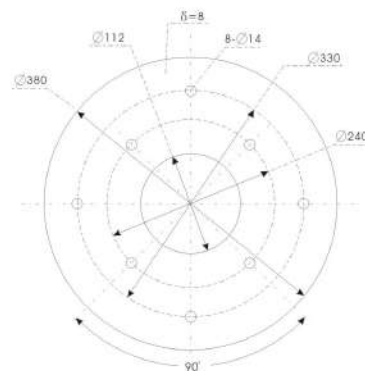

有效像素 (水平X垂直)	2,000,000(1080X920)
电子快门	1/50~1/10, 000s
曝光模式	自动, 背光补偿
白平衡	自动白平衡
增益控制	Auto, EV compensation, DynaView
镜头类型	变焦镜头
压缩格式	JPEG,MPEG-4,H.264
协议	TCP/IP,HTTP,ARP,ICMP,FTP,SMTP,DHCP,SNMP,DNS,NTP,RTP/RTCP
水平分辨率	480电视线
信噪比	≥50dB

Effective Pixels (horizontal X vertical)	2,000,000(1080X920)
Shutter	1/50~1/10, 000s
Exposure	Auto, Backlight compensation
Balance	Auto White Balance
Gain Control	Auto, EV compensation, DynaView
Lens Type	Zoom
Compression Format	JPEG, MPEG-4, H.264
Agreement	TCP/IP,HTTP,ARP,ICMP,FTP,SMTP,DHCP,SNMP,DNS,NTP,RTP/RTCP
Horizontal resolution	480 TV lines
SNR	≥50dB